

dispox® CQ

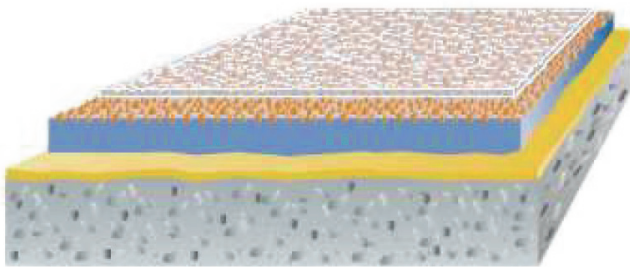
The visually appealing floor coating for surfaces subject to heavy wear, with a slip resistance of R 9 to R 13.





System description

- Decorative floor coating based on based on high-quality epoxy resin with coloured quartz R10-R12.
- Slip resistance level R10
- in an average system thickness of 3 mm as a complete service

Area of application

- Decorative floor coating for assembly areas,
- Presentation and exhibition areas,
- Social areas,
- Food processing,



-  Surface sealant
-  Base layer
-  Primer
-  Substrate/shot-blasted

Characteristics

- Decorative floor coating based on epoxy resin with coloured quartz sand,
- Many visual design options possible,
- High-quality look,
- Lower scratch sensitivity compared to homogeneous systems,
- Time-delayed installation possible
- Improved cleaning ability
- Significantly improved cleanability when using a special cleaning agent
- Liquid-tight on the surface

Technical data

- Compressive strength: 90 N/mm²
DIN EN 196 / ASTM C 109
- Shore D hardness: 80
DIN 53505 / ASTM D 2240