


dispox® WDO

Water vapour permeable floor coating especially for magnesite screeds or for floors that must remain breathable.

System description

- Homogeneous, water vapour permeable floor coating based on high-quality epoxy resin
- Average layer thickness 1 - 2 mm.
- Smooth, glossy or matt surface
- Slip resistance level R9 - R12 as a complete service

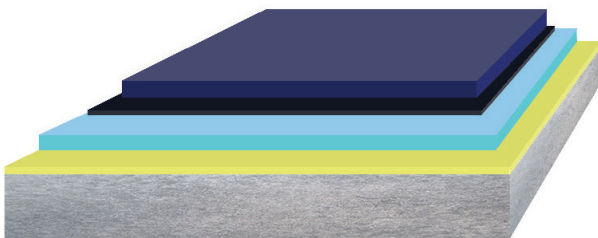

- Sealing glossy or matt R9 - R11
- Top coating
- Levelling layer / insulation layer
- Primer
- Substrate/shot-blasted

Area of application

- Assembly areas,
- furniture industry,
- Logistics areas,

Characteristics

- open to water vapour diffusion,
- suitable floor coating for magnesite screeds,
- also available in a conductive version,
- durable and long-lasting,
- low odour development during processing,
- many colours available,
- good cleanability
- slip-resistant up to R13 V4
- also available as dissipative <math><10^6</math> ohms

Technical data

- Compressive strength: 70 N/mm²
DIN EN 196 / ASTM C 109
- Shore D hardness 75
DIN 53505 / ASTM D 2240