

dispox[®] Dekor

The hard-wearing, decorative floor coating
with visual appeal and increased cleanability.

System description

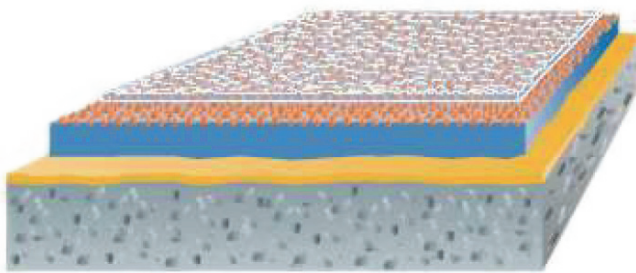
- Homogeneous floor coating based on high-quality epoxy resin.
- Smooth, glossy surface
- Slip resistance level R9 to R11
- in a average system thickness of 1.5 - 2.0 mm as a complete service





Area of application

- Production facilities
- Assembly areas
- Logistics areas
- Plastics processing
- Presentation areas,
- Exhibition areas

Characteristics

- Self-levelling epoxy resin coating
- Highest industrial quality
- extreme early strength, fully loadable after 12-18 hours at 20°C
- High installation performance
- Time-delayed installation possible
- Fully coloured, homogeneous surface
- Significantly improved cleanability when using a special cleaning agent
- Liquid-tight on the surface
- Many standard colours
- Odourless, no nuisance



-  Top sealing
-  Covering with coloured chips
-  Primer
-  Substrate/shot-blasted

Technical data

- Compressive strength: 80 N/mm²
DIN EN 196 / ASTM C 109
- Shore D hardness firm, filled: (approx. 50%)
approx. 82
DIN 53505 / ASTM D 2240