

dispox[®] Uni

The most frequently installed industrial floor coating!

System description

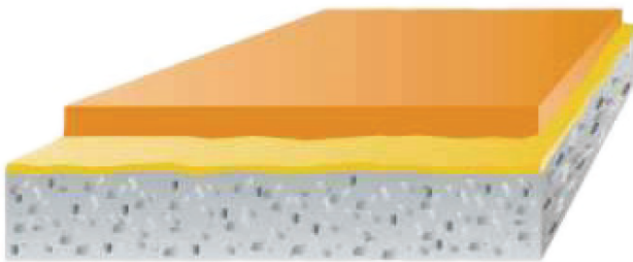
- Homogeneous floor coating based on high-quality epoxy resin.
- Smooth, glossy surface
- Slip resistance level R9
- in a medium system thickness of 1.5 - 2.0 mm as a complete service




Area of application

- Production facilities
- Assembly areas
- Logistics areas
- Plastics processing

Characteristics

- Highest industrial quality
- extreme early strength, approx. 70% of the characteristics after 12-18 hours at 20°C
- High installation performance
- Time-delayed installation possible
- Fully coloured, homogeneous surface
- Improved cleaning ability
- Significantly improved cleanability when using a special cleaning agent
- Liquid-tight on the surface
- Many standard colours



-  Top coating
-  Primer
-  Substrate/shot-blasted

Technical data

- Compressive strength: 80 N/mm²
DIN EN 196 / ASTM C 109
- Shore D hardness firm, filled: (approx. 50%)
approx. 82
DIN 53505 / ASTM D 2240